

InGaP HBT Gain Block DIE

Product Features

- 0.01 to 7GHz
- +15.7dBm P-1dB at 2GHz
- +28dBm OIP3 at 2GHz
- 15dB Gain at 2GHz
- 4dB Noise Figure
- \bullet Internally-Matched to 50 Ω
- Available as bare die

Product Description

The GSA606-00 is a 50 Ohm matched General Purpose Gain Block Amplifier that covers the 0.01MHz to 6GHz frequency range with 15dB nominal gain at 2GHz.

The GSA606-00 is a Darlington pair amplifier fabricated with high reliability InGaP/GaAs Heterojunction Bipolar Transistor (HBT) process. It only requires DC blocking capacitors, a bias stabilization resistor, Rbias, and a single RF choke for operation. The amplifier is ideal for wireless and test equipment applications.

This broadband RFIC can be used for current and next generation test equipment and wireless applications to 7GHz


Applications

- Mobile infrastructure
- ISM
- WLAN
- RFID
- Test Equipment

Specifications (1)


Parameter	Units	Min	Тур	Max
-3dB Bandwidth	MHz	DC		9000
Test Frequency	MHz		2000	
Gain	dB	14.5	15	
Pout @ -1dB GCP	dBm		+15	
Input Return Loss	dB		15	
Output Return Loss	dB		15	
OIP3	dBm		28	
Noise Figure	dB		4	
Operating Current	mA		48	


1.Test conditions unless otherwise specified: 25°C, Supply Voltage = +6.00V, Rbias=22Ω, 50 Ohm System

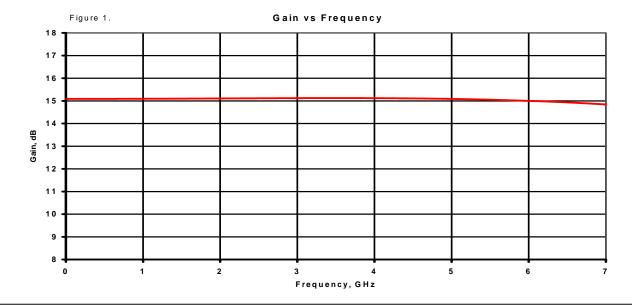






InGaP HBT Gain Block DIE

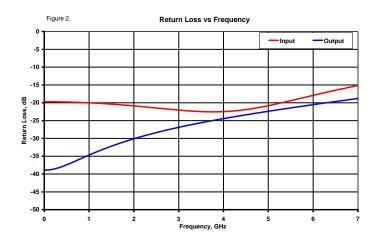

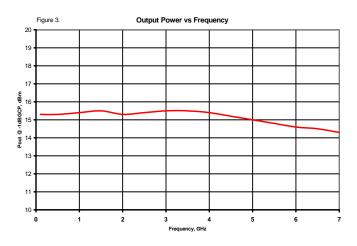

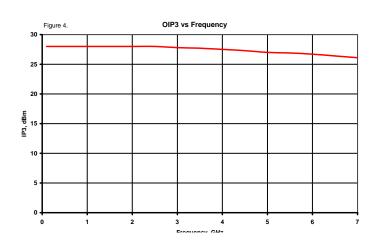

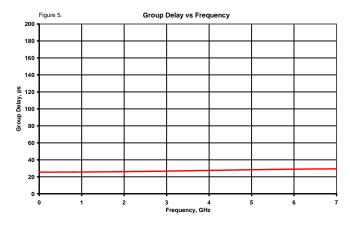

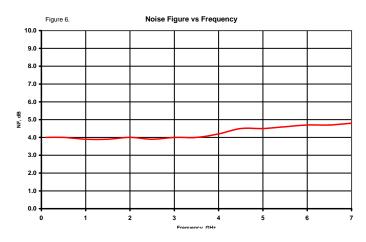

Absolute Maximum Ratings

Parameter Rating

Case Temperature, Operating
Storage Temperature
Device Current
RF Input Power, continuous
Junction Temperature
Device above any of these parameters will cause permanent damage.

Rating

-40 to +85 °C

-55 to +150 °C


80mA


+10 dBm

250 °C



InGaP HBT Gain Block DIE

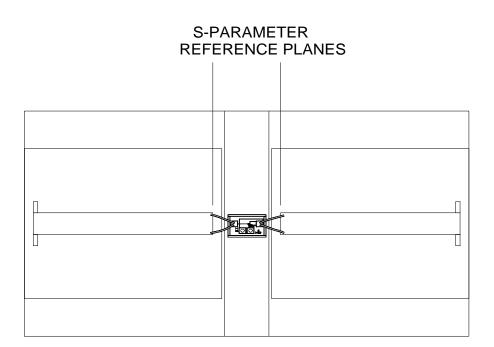

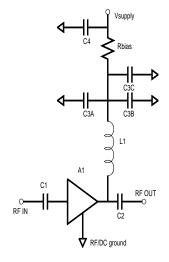


Application Schematic

Parts Lis	st: (Vsupply	=6.00Vdc)
Rbias	22 Ohms	0603 size
C1, C2	10nF	0402 ATC520L103KT16T
C3A	10pF	0603
C3B	220pF	0603
C3C	0.1uF	0603
C4	4.7uF	1210
L1	8uH	Coilcraft BCS-802JLC

Note that Rbias is required for DC current stability with temperature.



InGaP HBT Gain Block DIE

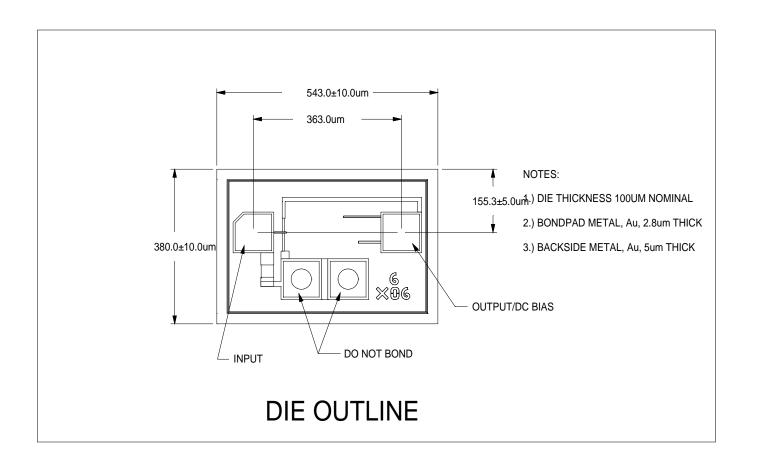

GRASEN Technology, LLC reserves the right to make changes to the products listed in the data sheet at any time without notice. Consult with GRASEN or an authorized sales representative to verify the information in this data sheet before using this product. GRASEN does not assume liability for the usage of this product described herein. GRASEN does not convey a license under any patent rights, copyrights, trademark rights or any intellectual rights of GRASEN or third parties.